


PARTS LIST

MARK	PARTICULAR	MATERIALS	QUAN.	REMARK
1	BODY	SUS304	1	
2	FLAPPER	SUS304	1	
3	REED SWITCH		1	
4	MAGNET	FERRITE	1	
5	SPINDLE	SUS304	1	
6	STOPPER BOLT	SUS303	1	*
7	TERMINAL BOX	AC2A	1	

* WITH CUSHION SPRING

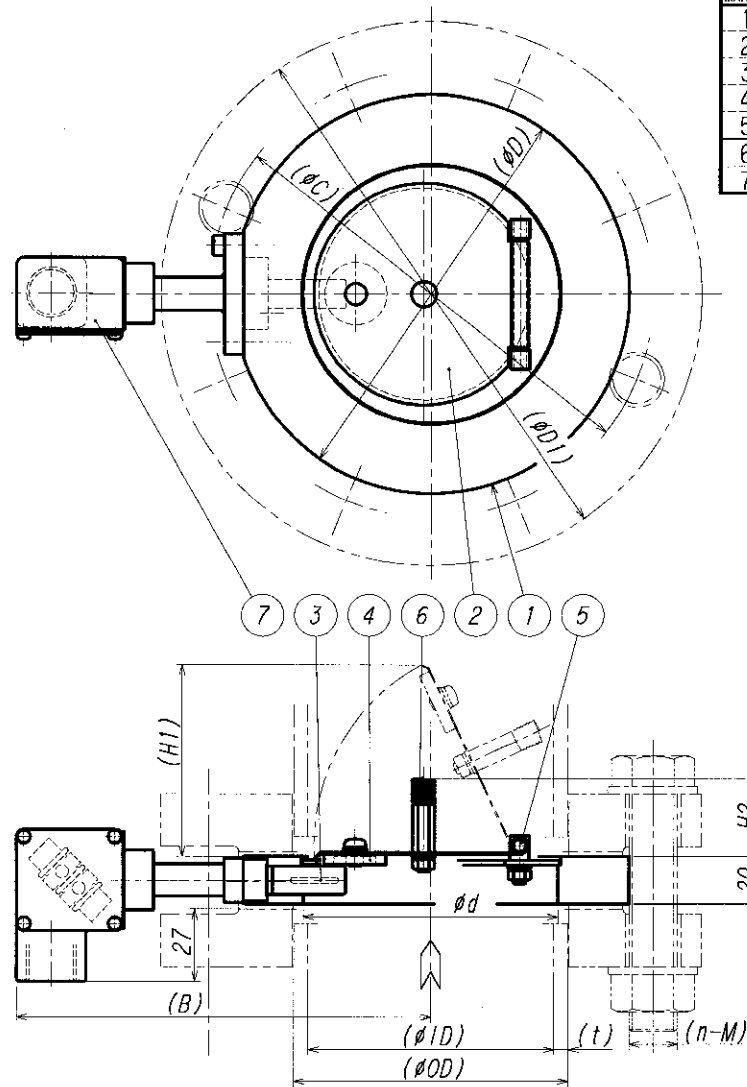

Straight pipe section
for guaranteeing accuracy
••Before and after 3D
(3times diameter)

DIMENSIONS

JIS B2238 10K FF

SIGNAL
FLOW RATE Q
(L/min)

SIZE	d	D	B	H1	H2	D1	C	n	M	OD	ID	t	Q	
40A	1 1/2 B	49	89	130	33	20	140	105	4	M16	48.6	40.6	4.0	10.0
50A	2 B	58	104	138	42	27	155	120	4	M16	60.5	52.5	4.0	10.0
65A	2 1/2 B	72	124	148	53	28	175	140	4	M16	76.3	66.3	5.0	10.0
80A	3 B	82	134	157	68	29	185	150	8	M16	89.1	78.1	5.5	10.0
100A	4 B	106	159	170	83	39	210	175	8	M16	114.3	102.4	6.0	20.0
125A	5 B	131	190	190	107	46	250	210	8	M20	139.8	125.8	7.0	20.0
150A	6 B	156	220	204	127	52	280	240	8	M20	165.2	151.2	7.0	30.0
200A	8 B	205	270	230	168	68	330	290	12	M20	216.3	200.3	8.0	30.0
250A	10 B	266	333	266	205	90	400	355	12	M22	267.4	247.4	10.0	80.0

第3角法 3RD ANGLE PROJECTION		DIMENSION IN mm	
尺度 SCALE	作成日 DATE	設計圧力 DESIGNED PRESS.	設計温度 DESIGNED TEMP.
NTS		1.4 MPa	60 °C
作成 DRAWN	設計 DESIGNED	確認 CHECKED	承認 APPROVED

TAIYO VALVE MFG. CO., LTD.
SU4-WHR-U-T
10K 40~250A FLOW SWITCH