


PARTS LIST

| MARK | PARTICULAR     | MATERIALS | QUAN | REMARK |
|------|----------------|-----------|------|--------|
| 1    | BODY           | FCMB 340  | 1    |        |
| 2    | SHEET RING     | SUS403    | 1    |        |
| 3    | DISC           | SUS304    | 1    |        |
| 4    | STEM           | SUS304    | 1    |        |
| 5    | NUT            | FCMB 340  | 1    |        |
| 6    | GASKET         | SHEET     | 1    | *      |
| 7    | COVER          | FCMB 340  | 1set |        |
| 8    | PACKING        | V#7233    | 1    |        |
| 9    | GLAND          | SS400     | 2set |        |
| 10   | BOLT, NUT      | SS400     | 1    |        |
| 11   | INDICATOR RING | SUS304    | 1    |        |
| 12   | INDICATOR      | SUS304    | 1    |        |
| 13   | YOKE COVER     | SS400     | 1    |        |
| 14   | SLEEVE         | C3604     | 1    |        |
| 15   | LOCK LEVER     | SCS13     | 1    |        |
| 16   | HANDLE         | FC200     | 1    |        |
| 17   | NUT            | SS400     | 1    |        |

\* NON ASBESTOS

| mass table |      |
|------------|------|
| SIZE       | mass |
| 15A 1/2 B  | 2kg  |
| 20A 3/4 B  | 3kg  |

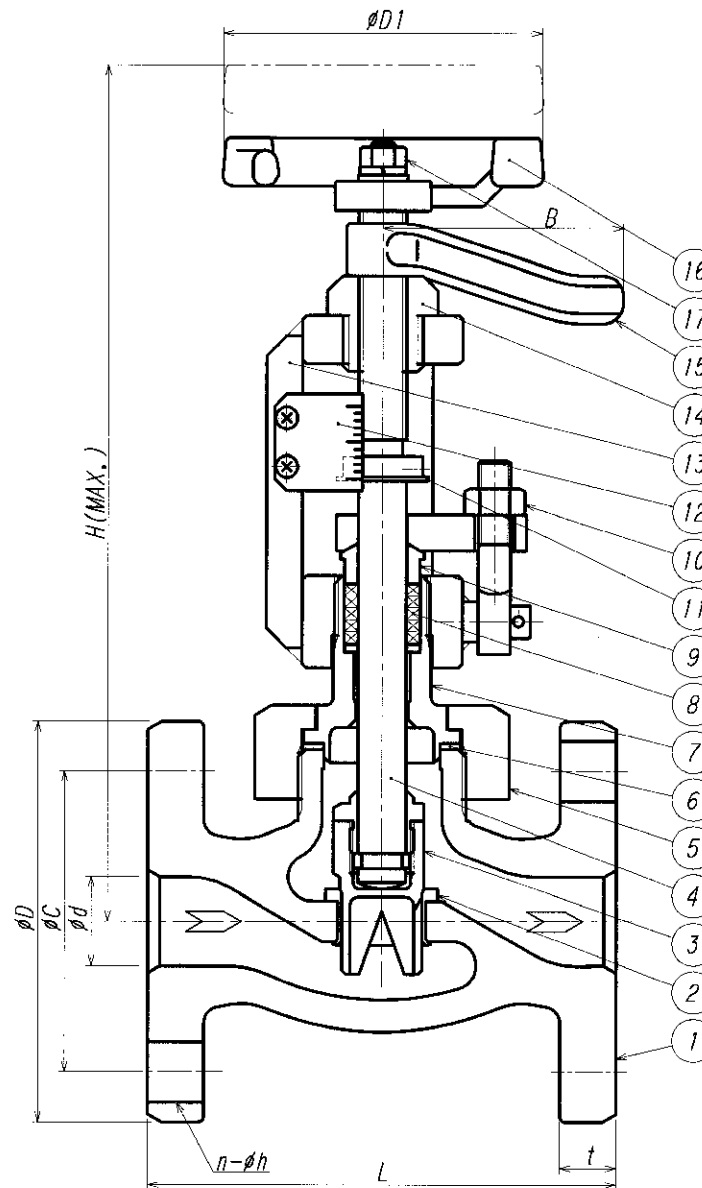

| 第3角法 3RD ANGLE PROJECTION |             | DIMENSION mm         |                     |
|---------------------------|-------------|----------------------|---------------------|
| 尺度 SCALE                  | 作成日 DATE    | 設計圧力 DESIGNED PRESS. | 設計温度 DESIGNED TEMP. |
| NTS                       |             | 1.0 MPa              | 80 °C               |
| 作成 DRAWN                  | 設計 DESIGNED | 確認 CHECKED           | 承認 APPROVED         |

TAIYO VALVE MFG. CO., LTD.

FCM-F with LOCK HANDLE & INDICATOR  
15~20A V-PORT CONTROL VALVE

| DIMENSIONS |    |     |    |     |     |    |    |    |   |    | B2239 10K FF |  |
|------------|----|-----|----|-----|-----|----|----|----|---|----|--------------|--|
| SIZE       | d  | L   | B  | H   | D   | C  | t  | h  | n | D1 |              |  |
| 15A 1/2 B  | 15 | 108 | 50 | 210 | 95  | 70 | 12 | 15 | 4 | 80 |              |  |
| 20A 3/4 B  | 22 | 117 | 60 | 213 | 100 | 75 | 14 | 15 | 4 | 80 |              |  |